Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

PM

28BYJ 30BYJ 35BYJ

STEPPING MOTOR

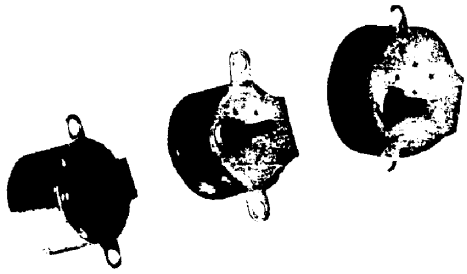

Jameco Part Number 173180

SPECIFICATIONS

Model	No. of Phase	Voltage	Current	Resistance	Step Angle	Moderating Ratio	No-load pullout Frequency	No-load Starting Frequency	Pullin Torque	Detent Torque	Fig
		V	mA	Ω	Deg.		pps	pps	gf.cm	gf.cm	
28BYJ01A	4	12	40	300	5.625/64	1/64	900	550	300	350	
28BYJ02A	4	12	60	200	5.625/64	1/64	1000	600	400	350	1
28BYJ01C	4	12	40	300	5.625/64	1/64	900	550	300	350	2
30BYJ01	4	12	40	300	7.5/85.25	1/85.25	800	450	350	350	9
30BYJ02	4	12	60	200	7.5/85.25	1/85.25	900	500	400	400	9
30BYJ01A	4	12	40	300	7.5/85.25	1/85.25	800	450	350	350	4
30BYJ01B	4	12	40	300	7.5/85.25	1/85.25	800	450	350	350	5
30BYJ02C	4	12	60	200	7.5/85.25	1/85.25	900	500	400	400	6
30BYJ01D	4	12	40	300	7.5/85.25	1/85.25	800	450	350	350	7
30BYJ02AH	4	12	60	200	7.5/85.25	1/85.25	900	500	400	400	8
30BYJ02HL	4	12	60	200	7.5/85.25	1/85.25	900	500	400	400	3
30BYJ03ML	4	12	75	160	7.5/85.25	1/85.25	950	550	500	400	10
35BYJ01	4	12	95	130	7.5/85.25	1/85.25	800	400	800	800	11
35BYJ02	4	12	60	200	7.5/85.25	1/85.25	800	350	600	400	11
35BYJ02A	4	12	60	200	7.5/85.25	1/85.25	800	350	600	400	12
35BYJ03	4	12	40	400	7.5/85.25	1/85.25	800	350	450	450	11

Figure

Fig.1

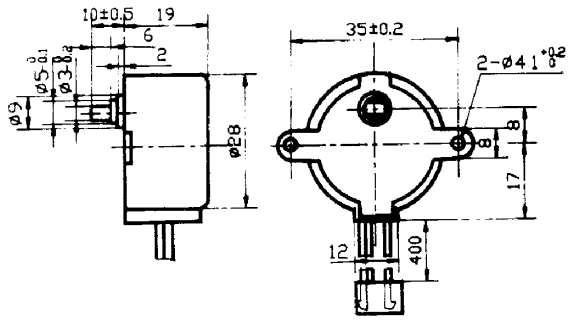

Fig.2

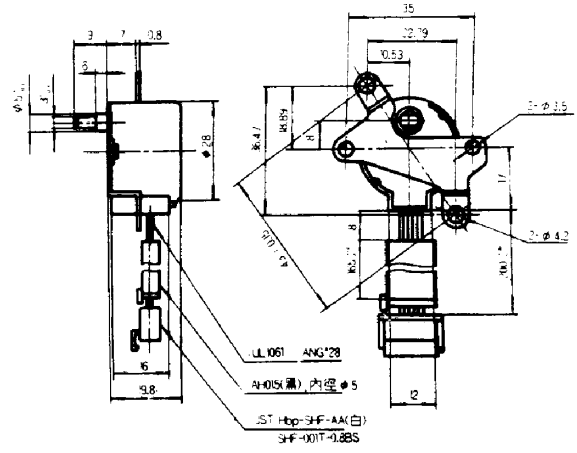

Fig.3

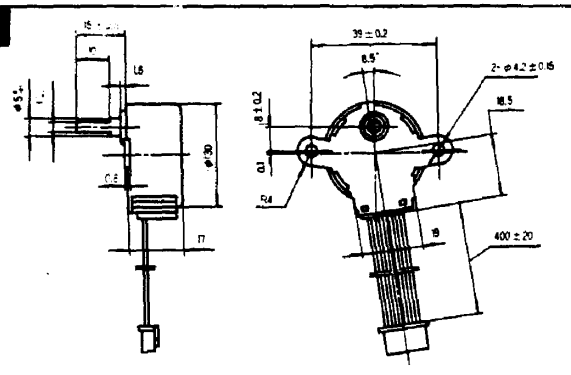

Fig.4

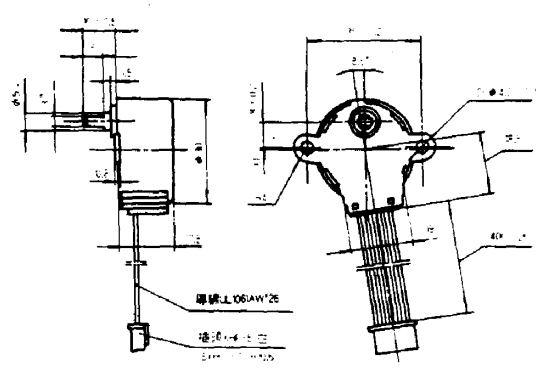

Fig.5

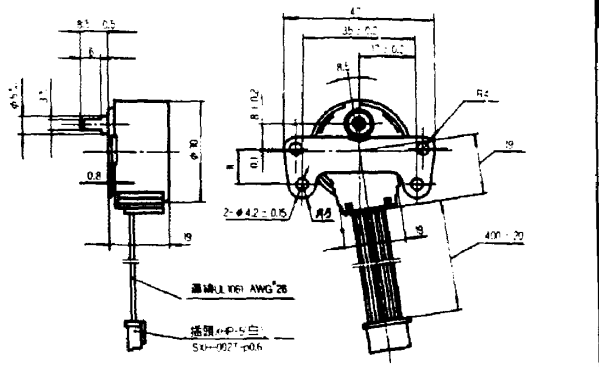

Fig.6

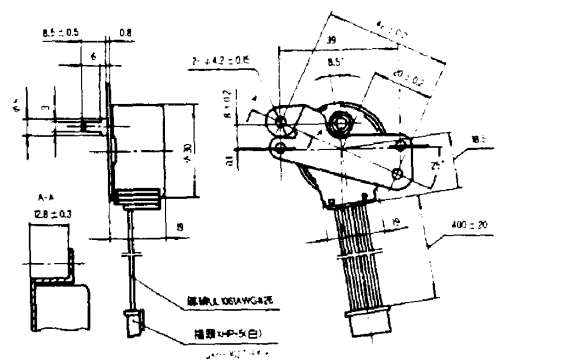

Fig.7

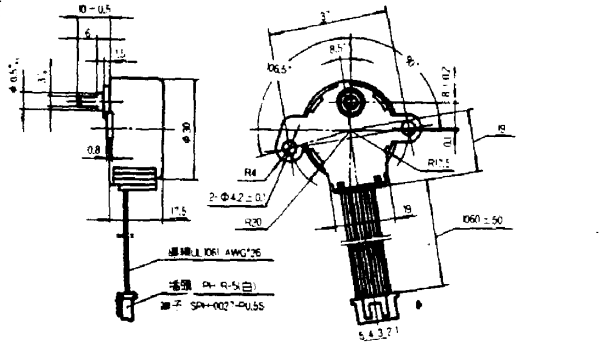

Fig.8

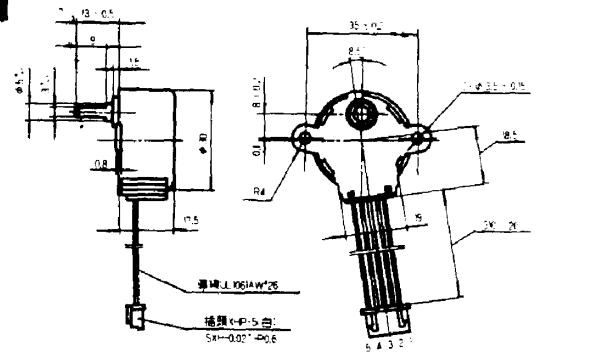

Fig.9

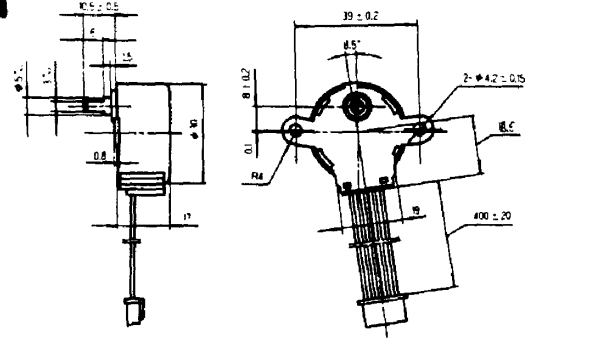

Fig.10

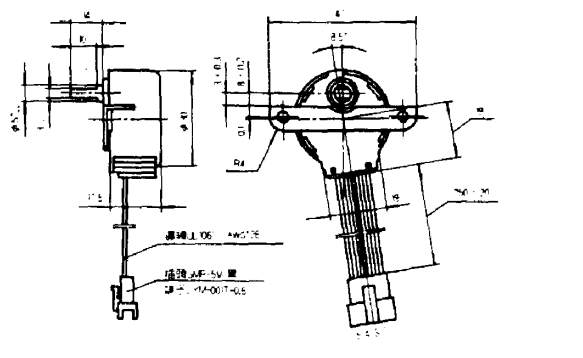

Fig.11

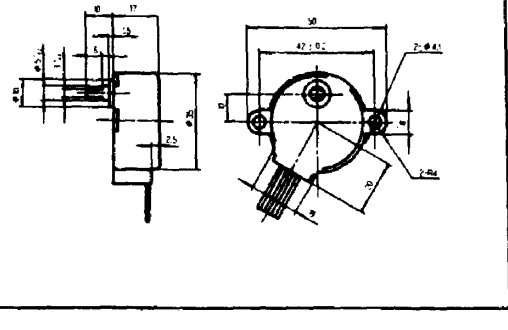

Fig.12

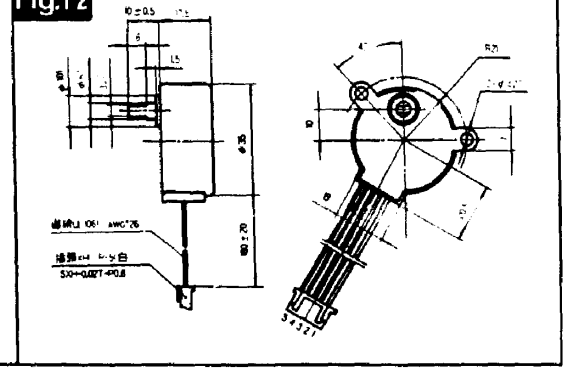

接綫圖 Wiring Diagram